

SILVERLINE SERIES


Nominal Diameter : **4"**

Nominal Flow : **18m³/h**

Outlet Size : **2"**

Performance Table

DIMENSIONS & WEIGHT



PUMP MODEL	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
	kW	HP	OD	RP	H	
S4P-18/04	1.1	1.5	98	50	407	3.8
S4P-18/06	1.5	2.0	98	50	648	5.0
S4P-18/09	2.2	3.0	98	50	860	6.5
S4P-18/13	3.7	5.0	98	50	1142	9.8
S4P-18/14	4.0	5.5	98	50	1213	10.5
S4P-18/20	5.5	7.5	98	50	1637	15.5
S4P-18/22	5.5	7.5	98	50	1778	18.0
S4P-18/26	7.5	10.0	98	50	2060	19.1
S4P-18/28	7.5	10.0	98	50	2201	22.0

PUMP MODEL	MOTOR kW	lps	0	2.78	3.33	3.86	4.44	5	5.56	6.11
		m ³ /h	0	10	12	14	16	18	20	22
S4P-18/04	1.1	TOTAL MANOMETRIC HEAD IN METRES - (COLUMN WATER)	17	14	13	11	10	9	8	6
S4P-18/06	1.5		26	19	18	17	16	14	11	9
S4P-18/09	2.2		38	31	29	27	24	21	17	14
S4P-18/13	3.7		54	45	42	38	34	28	24	20
S4P-18/14	4.0		58	48	44	41	37	33	27	23
S4P-18/20	5.5		81	68	63	57	52	46	38	30
S4P-18/22	5.5		89	74	71	61	55	48	41	32
S4P-18/26	7.5		106	90	84	76	67	57	47	38
S4P-18/28	7.5		116	97	89	82	73	64	54	43

Note : The mounting dimensions of these pumps are in accordance with Manufacture standards.

In view of continuous developments, the information / descriptions / specifications / illustrations are subject to change without notice.

SILVER LINE SERIES


Nominal Diameter : **4"**

Nominal Flow : **18m³/h**

Outlet Size : **2"**

Performance Curves

Flow Range : 9 - 24 m³/h

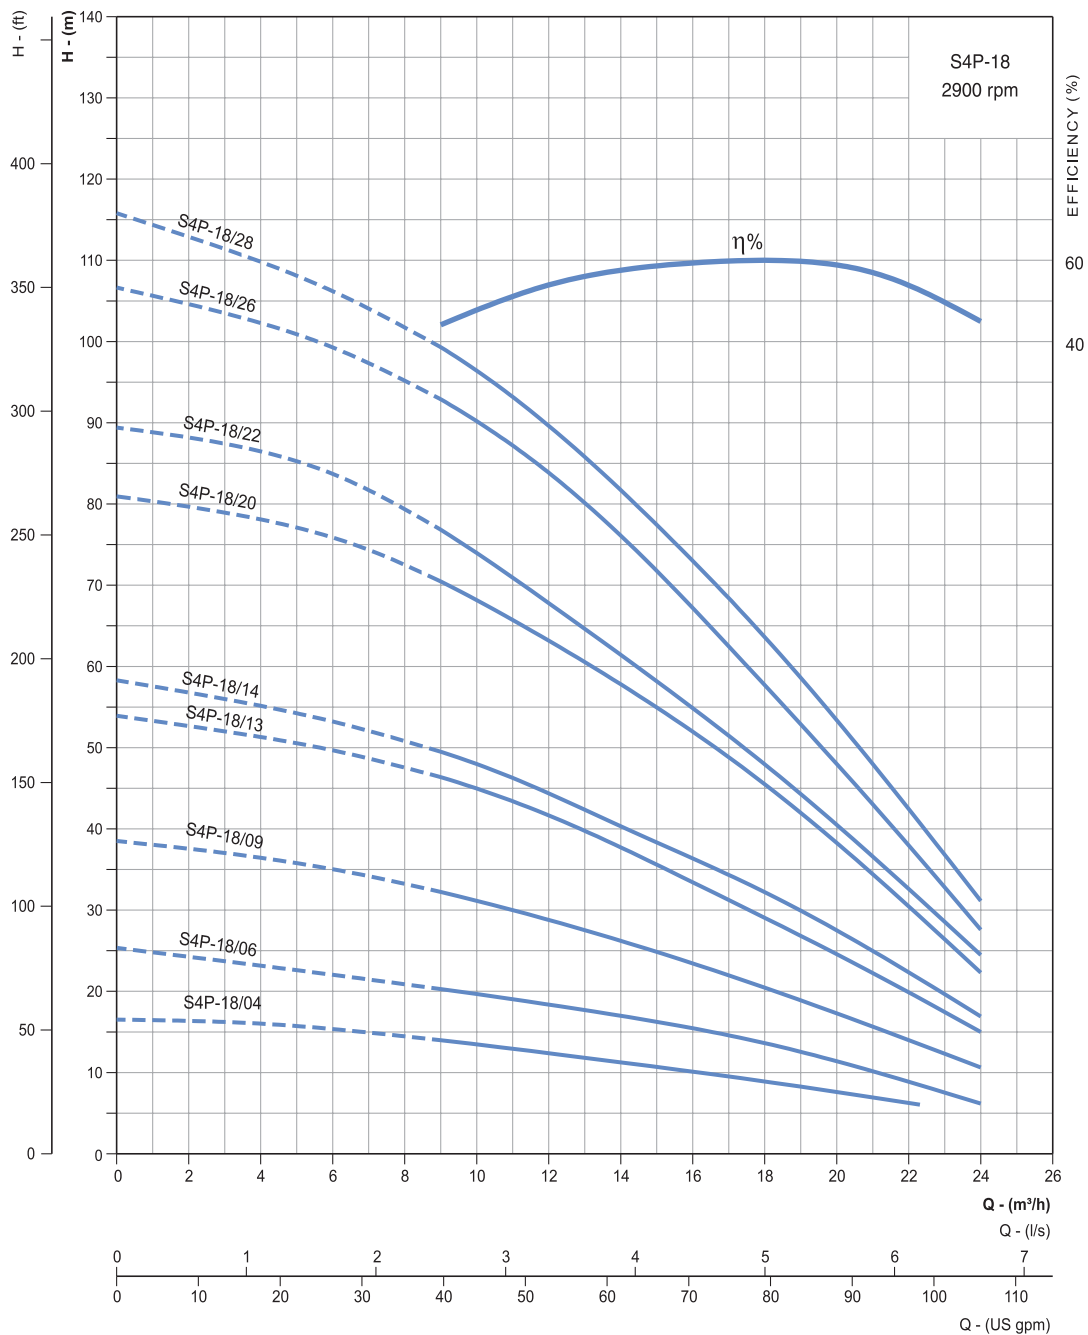

Refer General Information for performance curve conditions and for more details.
Curve tolerance according to ISO : 9906, Grade - 3B