

SILVERLINE SERIES

FLOATING IMPELLER MODEL


Nominal Diameter : **4**

Nominal Flow : **1.5m³/h**

Outlet Size : **1 1/4"**

Performance Table

DIMENSIONS & WEIGHT



PUMP MODEL	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
	kW	HP	OD	RP	H	
S4P-1E/08	0.37	0.5	98	32	414	3.3
S4P-1E/13	0.55	0.75	98	32	524	4.2
S4P-1E/17	0.75	1	98	32	654	5.0
S4P-1E/18	0.75	1	98	32	679	5.3
S4P-1E/25	1.1	1.5	98	32	860	8.8
S4P-1E/26	1.1	1.5	98	32	882	9.0
S4P-1E/33	1.5	2	98	32	1036	11.6
S4P-1E/34	1.5	2	98	32	1058	12.0

PUMP MODEL	MOTOR kW	TOTAL MANOMETRIC HEAD IN METRES - (COLUMN WATER)	lps	0	0.20	0.27	0.34	0.41	0.48	0.55
			m ³ /h	0	0.75	1.0	1.25	1.50	1.75	2.0
S4P-1E/08	0.37			54	46	42	38	32	24	15
S4P-1E/13	0.55			89	78	75	70	61	50	38
S4P-1E/17	0.75			116	101	94	84	73	59	43
S4P-1E/18	0.75			122	111	102	93	81	67	49
S4P-1E/25	1.1			166	148	135	118	101	81	59
S4P-1E/26	1.1			177	156	143	127	109	89	68
S4P-1E/33	1.5			220	199	179	160	136	112	88
S4P-1E/34	1.5			226	202	188	172	149	124	98

SILVER LINE SERIES


FLOATING IMPELLER MODEL

Nominal Diameter : **4"**

Nominal Flow : **1.5m³/h**

Outlet Size : **1 1/4"**

Performance Curves

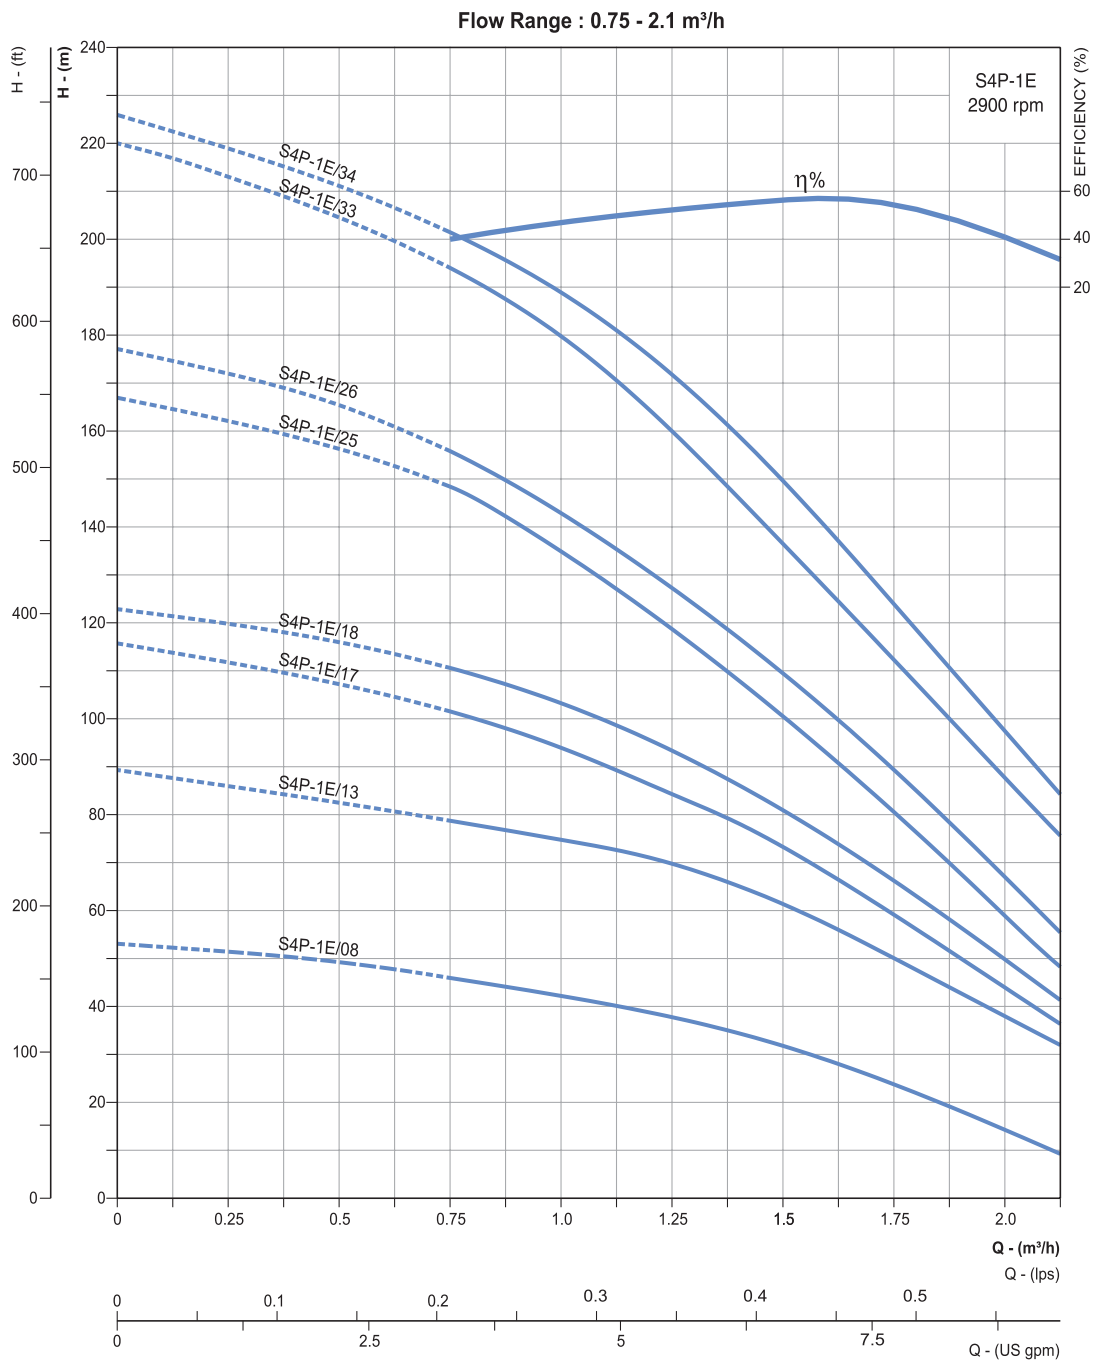

Refer General Information for performance curve conditions and for more details.
Curve tolerance according to ISO : 9906, Grade - 3B