

SILVERLINE SERIES

FLOATING IMPELLER MODEL


Nominal Diameter : **4"**

Nominal Flow : **3m³/h**

Outlet Size : **1¼"**

Performance Table

DIMENSIONS & WEIGHT

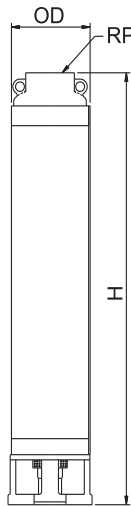

PUMP MODEL	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
	kW	HP	OD	RP	H	
S4P-3/07	0.55	0.75	98	32	426	2.8
S4P-3/08	0.55	0.75	98	32	453	3.4
S4P-3/11	0.75	1	98	32	533	3.9
S4P-3/15	1.1	1.5	98	32	671	4.9
S4P-3/20	1.5	2	98	32	818	7.9
S4P-3/21	1.5	2	98	32	844	8.2
S4P-3/28	2.2	3	98	32	1063	10.9
S4P-3/30	2.2	3	98	32	1117	11.7

PUMP MODEL	MOTOR kW	lps	0	0.55	0.69	0.83	0.97	1.11	1.25
		m ³ /h	0	2.0	2.5	3.0	3.5	4.0	4.5
S4P-3/07	0.55	TOTAL MANOMETRIC HEAD IN METRES - (COLUMN WATER)	52	42	38	33	26	18	10
S4P-3/08	0.55		59	52	45	39	31	22	13
S4P-3/11	0.75		80	70	62	54	45	34	22
S4P-3/15	1.1		111	98	88	77	63	48	30
S4P-3/20	1.5		150	128	116	101	82	61	38
S4P-3/21	1.5		157	133	121	107	86	63	40
S4P-3/28	2.2		208	177	161	141	115	88	55
S4P-3/30	2.2		221	190	172	151	125	96	62

Available types of materials of construction : P and V. In case of M.O.C. type - V the third digit of the pump model "P" will be replaced with "V".
 The given performance curves are same for Type - P & V.
 In view of continuous developments, the information / descriptions / specifications / illustrations are subject to change without notice.

SILVER LINE SERIES

FLOATING IMPELLER MODEL


Nominal Diameter : **4"**

Nominal Flow : **3m³/h**

Outlet Size : **1 1/4"**

Performance Curves

Flow Range : 1.75 - 5 m³/h

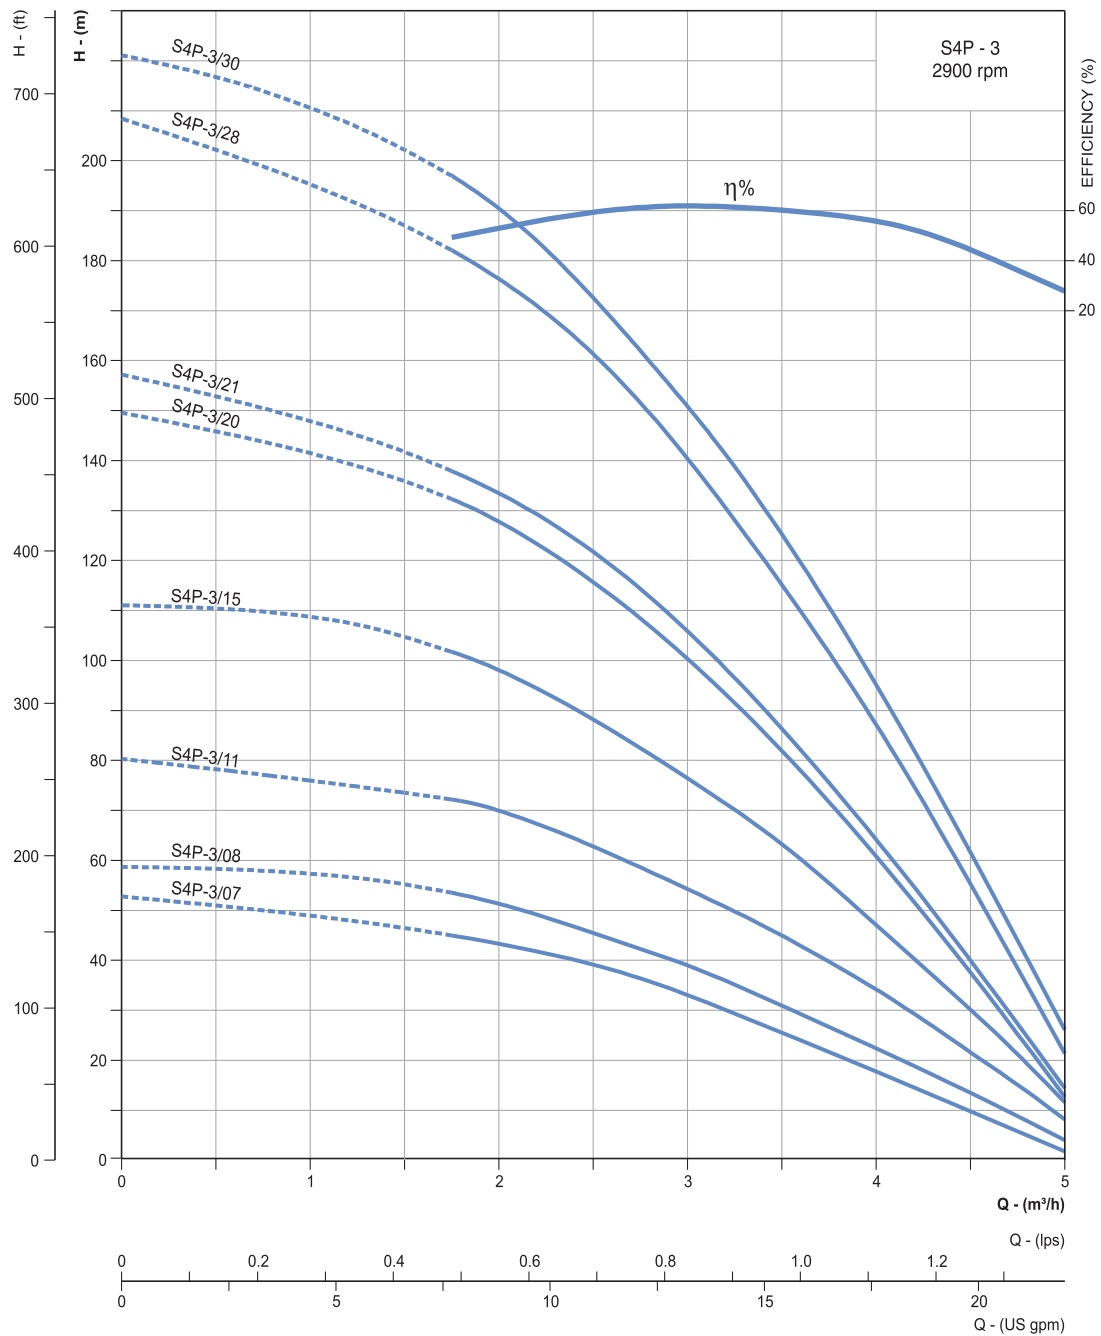

Refer General Information for performance curve conditions and for more details.
Curve tolerance according to ISO : 9906, Grade - 3B