

SILVERLINE SERIES

FLOATING IMPELLER MODEL


Nominal Diameter : **4"**

Nominal Flow : **4m³/h**

Outlet Size : **1 1/4"**

Performance Table

DIMENSIONS & WEIGHT

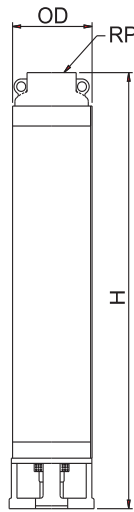

PUMP MODEL	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
	kW	HP	OD	RP	H	
S4P-4/05	0.55	0.75	98	32	383	1.9
S4P-4/06	0.55	0.75	98	32	412	2.4
S4P-4/07	0.75	1	98	32	441	3.3
S4P-4/10	1.1	1.5	98	32	528	4.0
S4P-4/11	1.1	1.5	98	32	557	4.4
S4P-4/14	1.5	2	98	32	674	5.6
S4P-4/15	1.5	2	98	32	703	6.0
S4P-4/20	2.2	3	98	32	860	8.0
S4P-4/22	2.2	3	98	32	918	8.8
S4P-4/27	3	4	98	32	1093	10.8
S4P-4/35	3.7	5	98	32	1325	14.0

PUMP MODEL	MOTOR kW	lps m ³ /h	0	0.55	0.83	1.11	1.39	1.66	1.80
			0	2	3	4	5	6	6.5
S4P-4/05	0.55	TOTAL MANOMETRIC HEAD IN METRES - (COLUMN WATER)	38	32	28	22	15	8	4
S4P-4/06	0.55		46	40	37	31	21	12	8
S4P-4/07	0.75		54	49	44	37	25	14	9
S4P-4/10	1.1		79	69	62	51	39	22	16
S4P-4/11	1.1		86	77	72	61	47	29	20
S4P-4/14	1.5		110	99	89	73	55	35	26
S4P-4/15	1.5		118	108	96	79	60	38	28
S4P-4/20	2.2		158	141	128	110	82	49	34
S4P-4/22	2.2		185	165	148	128	98	58	40
S4P-4/27	3		210	198	183	159	120	71	44
S4P-4/35	3.7		270	248	228	192	140	81	49

SILVER LINE SERIES

FLOATING IMPELLER MODEL


Nominal Diameter : **4"**

Nominal Flow : **4m³/h**

Outlet Size : **1 1/4"**

Performance Curves

Flow Range : 2.5 - 6.5 m³/h

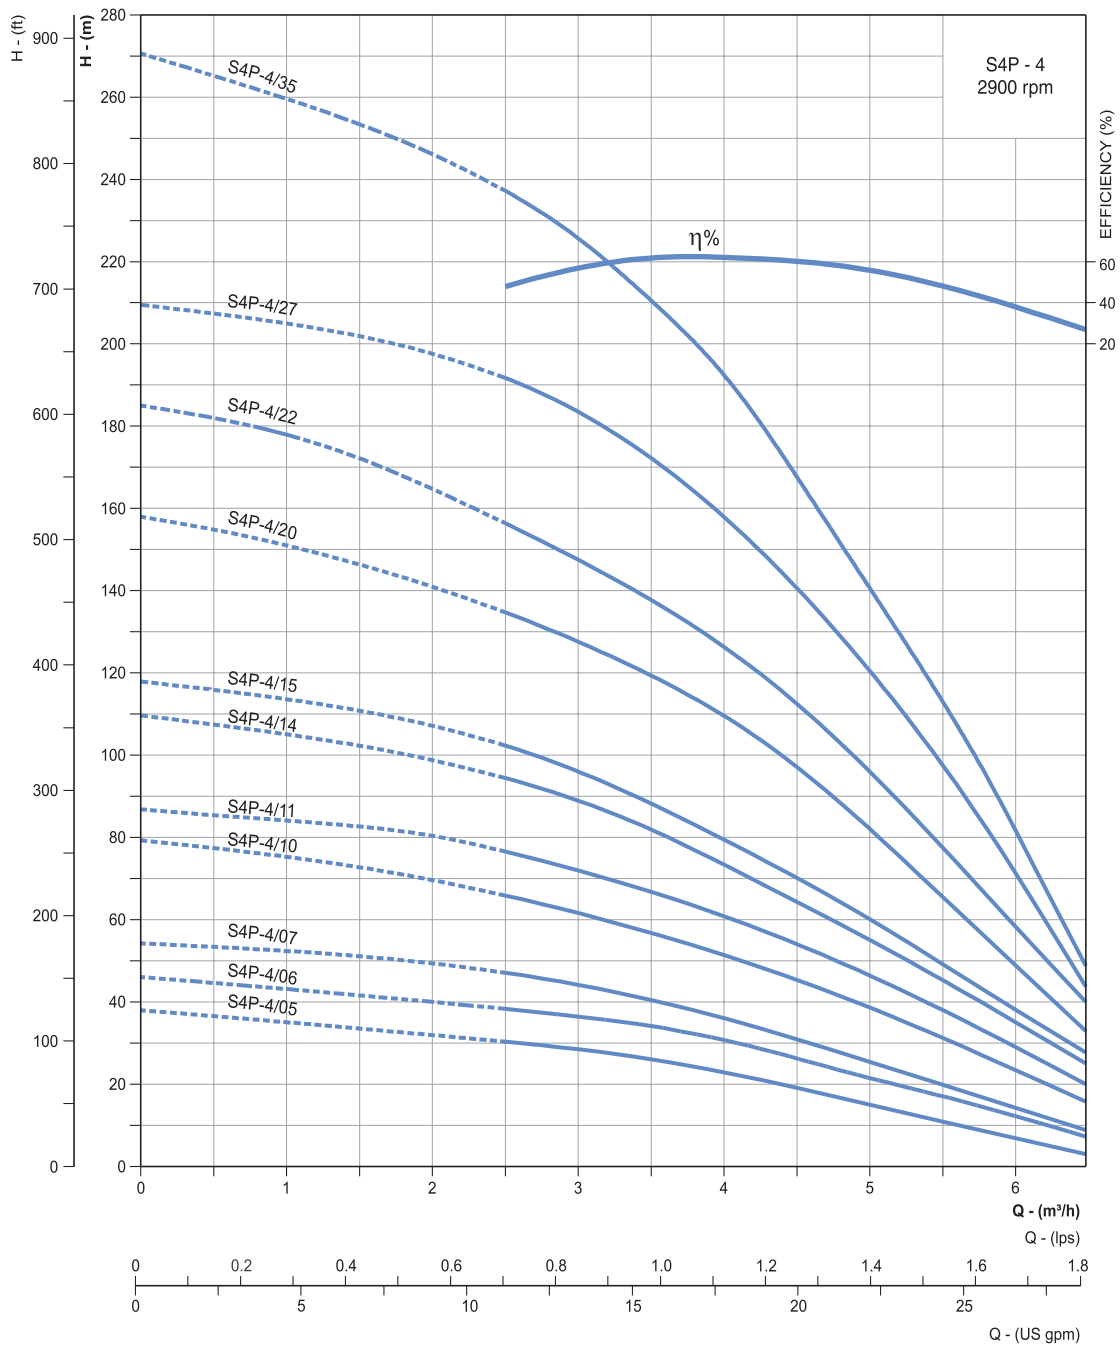

Refer General Information for performance curve conditions and for more details.
Curve tolerance according to ISO : 9906, Grade - 3B