

SILVERLINE SERIES

FLOATING IMPELLER MODEL


Nominal Diameter : **4"**

Nominal Flow : **5m³/h**

Outlet Size : **1½"**

Performance Table

DIMENSIONS & WEIGHT

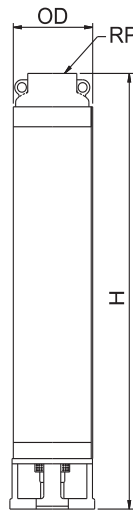

PUMP MODEL	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
	kW	HP	OD	RP	H	
S4P-5/06	0.75	1	98	40	459	3.4
S4P-5/08	1.1	1.5	98	40	533	3.0
S4P-5/09	1.1	1.5	98	40	570	3.5
S4P-5/11	1.5	2	98	40	643	4.3
S4P-5/12	1.5	2	98	40	680	4.8
S4P-5/17	2.2	3	98	40	907	6.6
S4P-5/21	3.0	4	98	40	1054	8.2
S4P-5/27	3.7	5	98	40	1306	10.5

PUMP MODEL	MOTOR kW	lps	0	0.83	1.11	1.39	1.66	1.94	2.22
		m ³ /h	0	3	4	5	6	7	8
S4P-5/06	0.75	TOTAL MANOMETRIC HEAD IN METRES - (COLUMN WATER)	42	39	37	32	27	18	9
S4P-5/08	1.1		58	53	49	42	34	25	15
S4P-5/09	1.1		65	59	55	50	41	31	17
S4P-5/11	1.5		79	72	67	58	48	35	20
S4P-5/12	1.5		86	78	73	65	55	42	25
S4P-5/17	2.2		123	115	105	91	76	57	31
S4P-5/21	3.0		145	135	126	111	92	70	39
S4P-5/27	3.7		184	163	158	138	116	80	42

SILVER LINE SERIES

FLOATING IMPELLER MODEL


Nominal Diameter : **4"**

Nominal Flow : **5m³/h**

Outlet Size : **1 1/2"**

Performance Curves

Flow Range : 3 - 8 m³/h

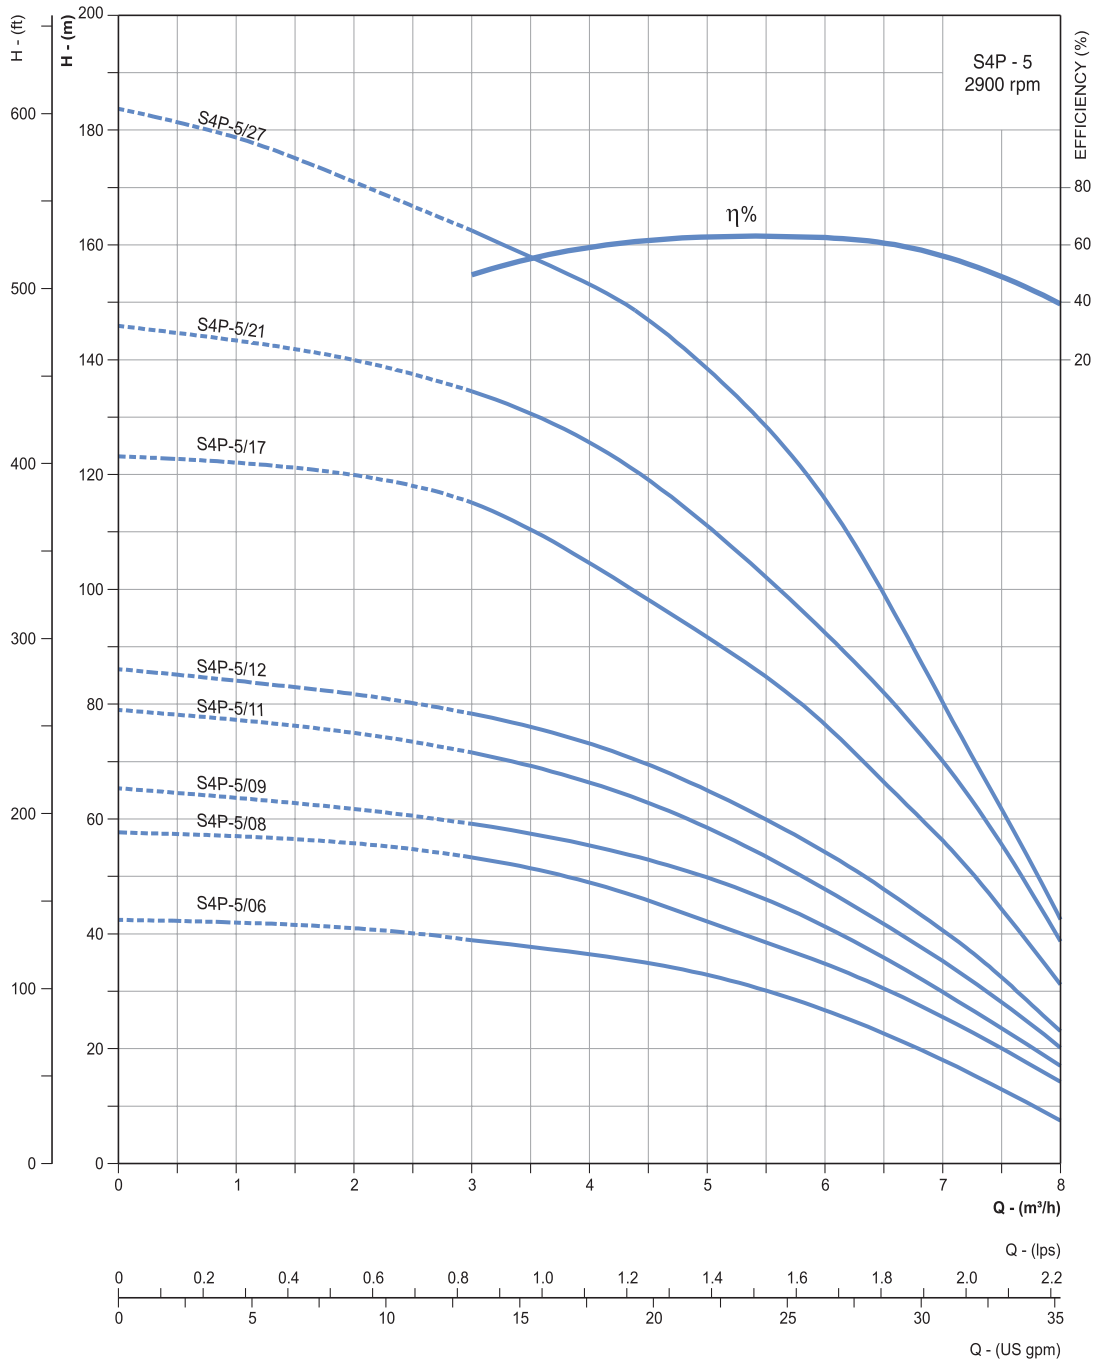

* These Models are available in Type - 'V' construction as well.

Refer General Information for performance curve conditions and for more details.
Curve tolerance according to ISO : 9906, Grade - 3B