

# SILVERLINE SERIES


Nominal Diameter : **4"**

Nominal Flow : **8m<sup>3</sup>/h**

Outlet Size : **2"**

## Performance Table

DIMENSIONS & WEIGHT

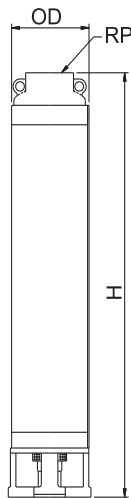

PUMP MODEL	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
	kW	HP	OD	RP	H	
S4P-8/04	0.75	1.0	98	50	374	3.8
S4P-8/06	1.1	1.5	98	50	436	4.4
S4P-8/08	1.5	2.0	98	50	498	3.2
S4P-8/13	2.2	3.0	98	50	653	6.5
S4P-8/17	3.0	4.0	98	50	807	7.9
S4P-8/23	4.0	5.5	98	50	993	10.0
S4P-8/32	5.5	7.5	98	50	1302	13.0
S4P-8/43	7.5	10	98	50	1643	17.5

PUMP MODEL	MOTOR kW	lps	0	1.11	1.66	2.22	2.78	3.33
		m <sup>3</sup> /h	0	4	6	8	10	12
S4P-8/04	0.75	TOTAL MANOMETRIC HEAD IN METRES - (COLUMN WATER)	25	21	20	19	14	8
S4P-8/06	1.1		38	35	32	28	22	13
S4P-8/08	1.5		51	48	45	40	31	20
S4P-8/13	2.2		82	72	69	61	48	29
S4P-8/17	3.0		108	101	96	85	69	43
S4P-8/23	4.0		143	132	122	109	88	52
S4P-8/32	5.5		200	182	168	148	116	68
S4P-8/43	7.5		270	242	221	193	149	88

Available types of materials of construction : P and V. In case of M.O.C. type - V the third digit of the pump model "P" will be replaced with "V".  
 The given performance curves are same for Type - P & V.  
 In view of continuous developments, the information / descriptions / specifications / illustrations are subject to change without notice.

# SILVER LINE SERIES


Nominal Diameter : **4"**

Nominal Flow : **8m<sup>3</sup>/h**

Outlet Size : **2"**

## Performance Curves

Flow Range : 4 - 12 m<sup>3</sup>/h

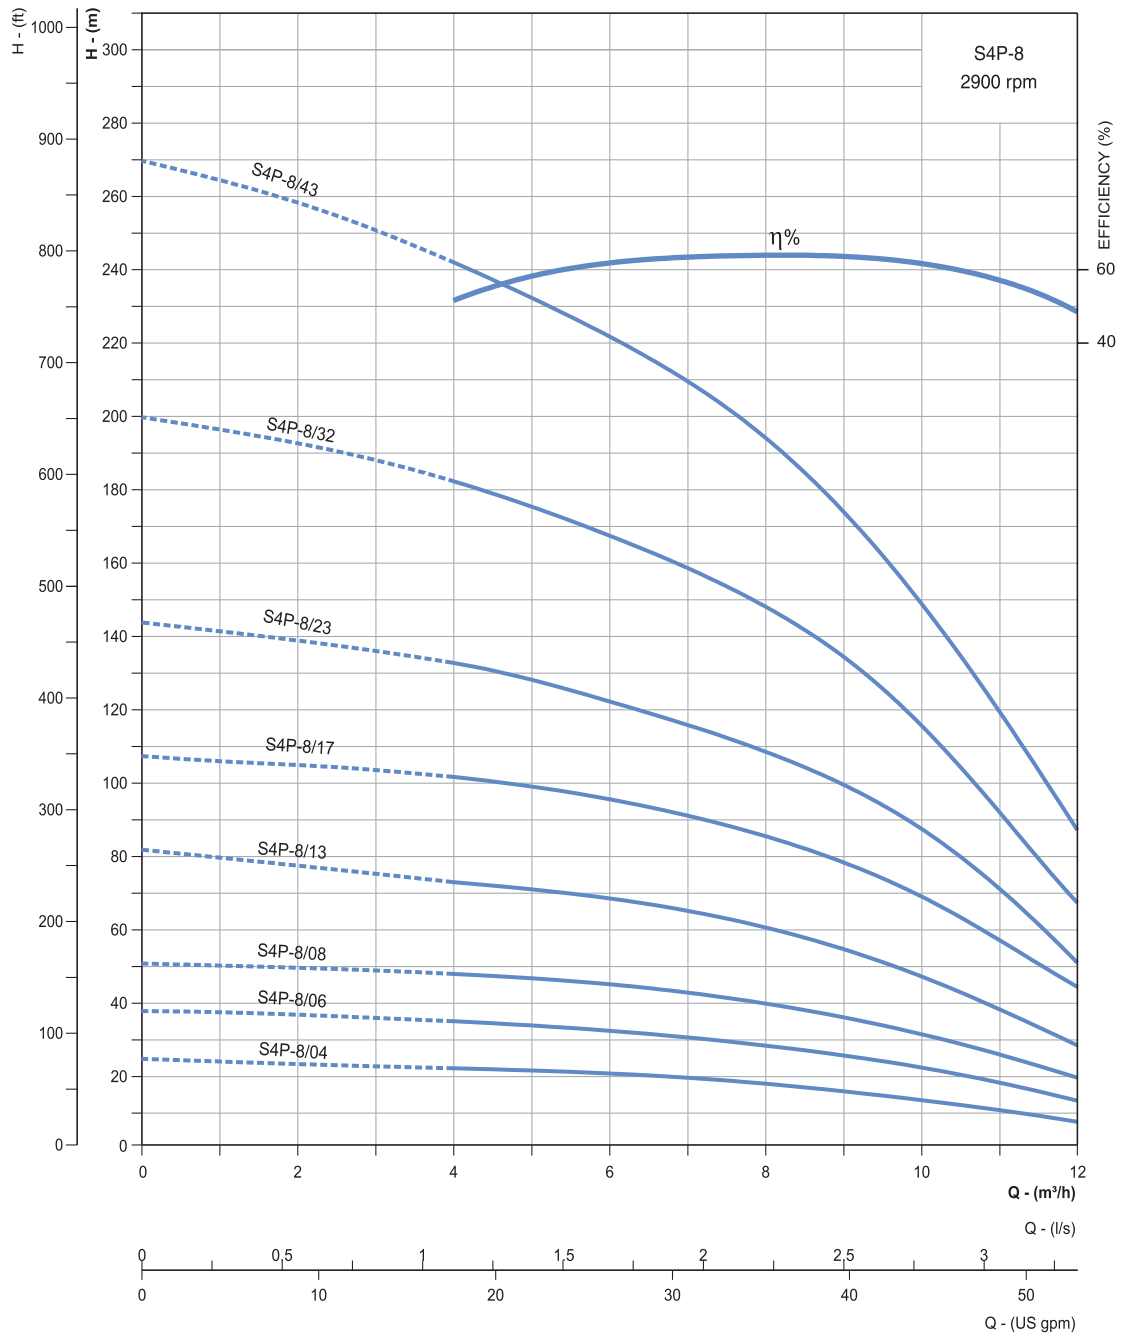

Refer General Information for performance curve conditions and for more details.  
Curve tolerance according to ISO : 9906, Grade - 3B