


STAINLESS STEEL SERIES

Nominal Diameter : **4"**

Nominal Flow : **25 gpm**

Outlet Size : **1½" NPT**

DIMENSIONS & WEIGHT TABLE

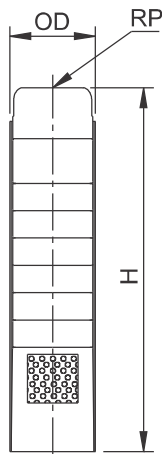

PUMP MODEL	REQUIRED MOTOR POWER		DIMENSIONS (Inches)			APPROX NETT. WEIGHT (lbs)
	kW	HP	OD	RP	H	
S4S-25-03	0.37	½	3.82	1½	9.09	4.81
S4S-25-05	0.55	¾	3.82	1½	10.91	6.09
S4S-25-07	0.75	1	3.82	1½	12.87	7.25
S4S-25-09	1.1	1½	3.82	1½	14.69	8.60
S4S-25-11	1.5	2	3.82	1½	16.42	9.37
S4S-25-15	2.2	3	3.82	1½	20.20	11.58
S4S-25-21	3	4/5	3.82	1½	26.10	14.88
S4S-25-26	3.7	5	3.82	1½	33.62	21.17
S4S-25-39	5.5	7½	3.82	1½	45.91	31.31
S4S-25-52	7.5	10	3.82	1½	59.13	40.46

PERFORMANCE TABLE

PUMP MODEL	HP	gpm	0	14	18	22	25	28	32	36
		m³/h	0	3.2	4.1	5	5.7	6.4	7.3	8.2
HEAD IN FEET	½	90	75	68	64	60	50	40	25	
	¾	140	116	115	100	96	80	75	36	
	1	200	172	160	148	138	122	97	65	
	1½	278	249	235	220	200	175	147	105	
	2	350	300	288	270	247	223	177	136	
	3	472	401	379	357	335	300	247	180	
	4/5	640	533	500	469	434	391	336	260	
	5	786	675	640	587	542	477	392	298	
	7½	1180	1006	937	847	780	704	597	469	
	10	1586	1302	1230	1125	1038	950	766	585	

Available types of materials of construction : S (S.S-304) and N (S.S-316). In case of M.O.C Type - N the third digit of the pump model "S" will be replaced with "N".
 The given performance curves are same for Type - S & N.
 In view of continuous developments, the information / descriptions / specifications / illustrations are subject to change without notice.

STAINLESS STEEL SERIES


Nominal Diameter : **4"**

Nominal Flow : **25 gpm**

Outlet Size : **1½" NPT**

PERFORMANCE CURVES

FLOW RANGE : 14 - 36 gpm

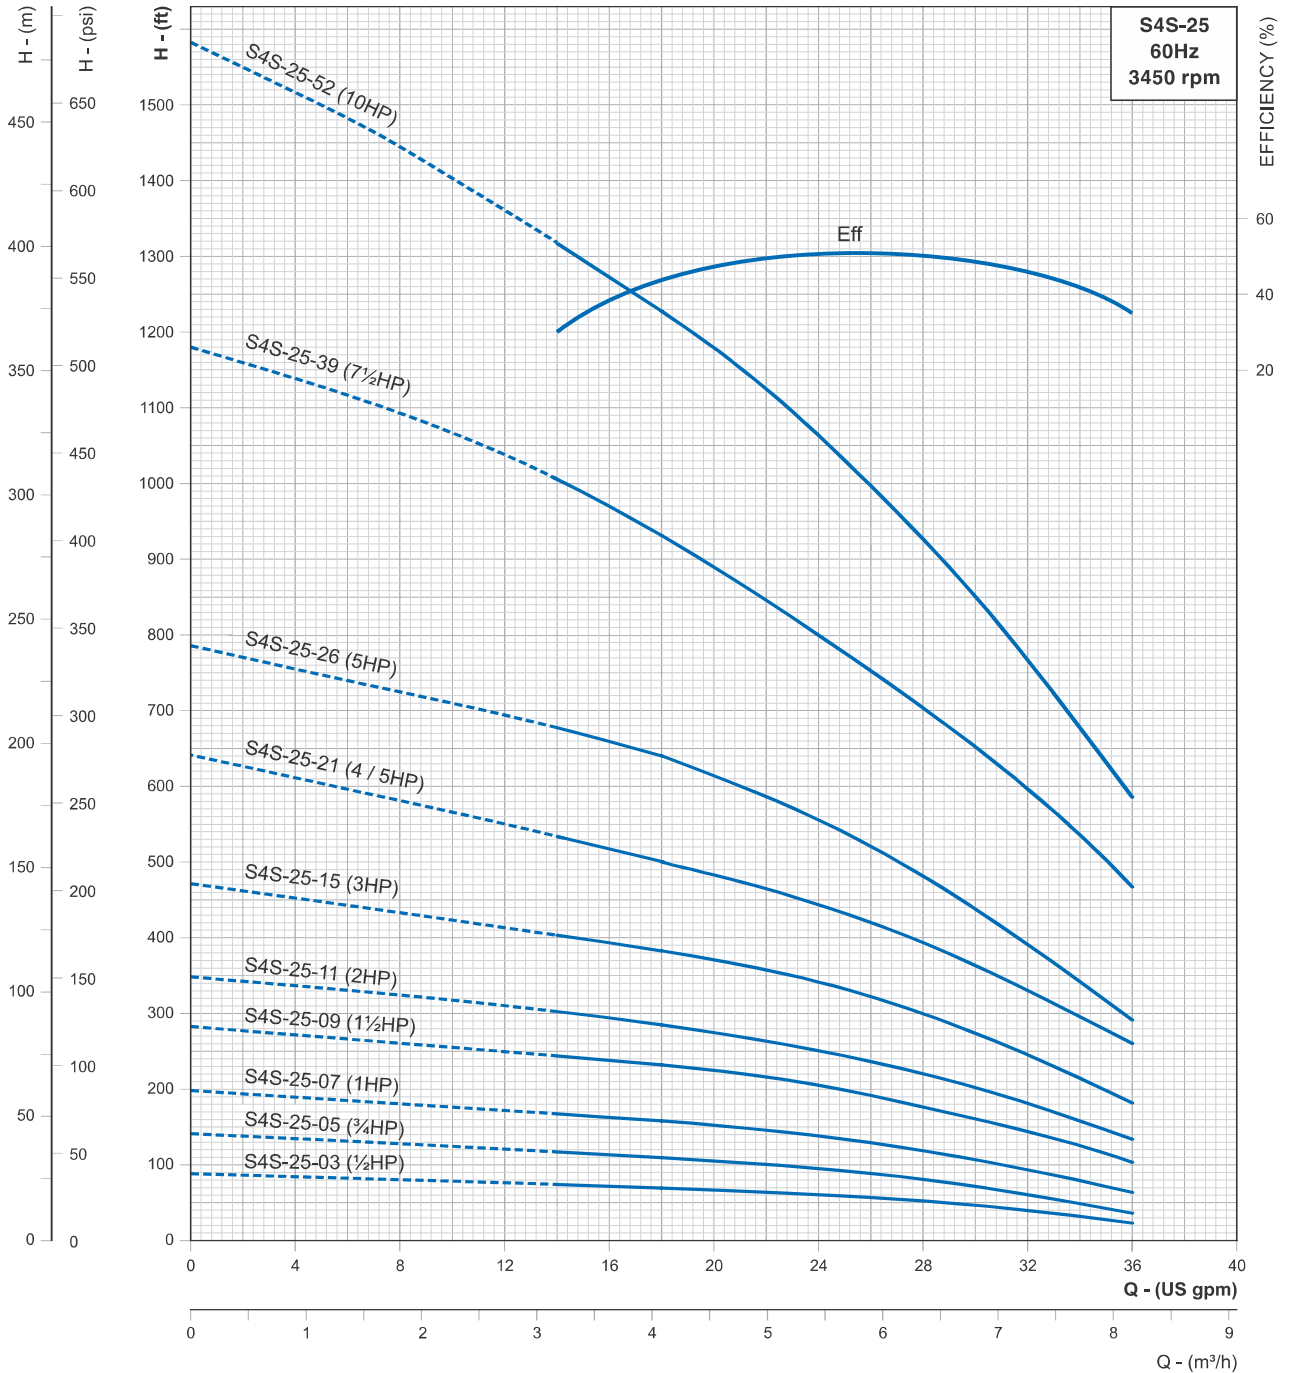

Refer General Information for performance curve conditions and for other details.
Curve tolerance according to ISO : 9906, Grade - 3B