

SILVERLINE SERIES

FLOATING IMPELLER MODEL


Nominal Diameter : **4"**

Nominal Flow : **2m³/h**

Outlet Size : **1 1/4"**

Performance Table

DIMENSIONS & WEIGHT

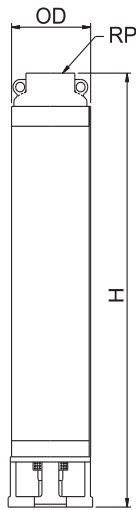

PUMP MODEL	REQUIRED MOTOR POWER		DIMENSIONS (mm)			APPROX NETT. WEIGHT (kg)
	kW	HP	OD	RP	H	
S4P-2/05	0.37	0.5	98	32	354	2.8
S4P-2/07	0.55	0.75	98	32	400	3.1
S4P-2/11	0.75	1	98	32	493	3.8
S4P-2/16	1.1	1.5	98	32	651	6.5
S4P-2/22	1.5	2	98	32	790	7.7
S4P-2/30	2.2	3	98	32	1006	10.5

PUMP MODEL	MOTOR kW	lps	0	0.27	0.41	0.55	0.69	0.83
		m ³ /h	0	1.0	1.5	2.0	2.5	3.0
S4P-2/05	0.37	TOTAL MANOMETRIC HEAD IN METRES - (COLUMN WATER)	44	40	38	31	25	13
S4P-2/07	0.55		62	59	52	45	34	22
S4P-2/11	0.75		98	90	82	70	53	35
S4P-2/16	1.1		143	131	119	100	78	48
S4P-2/22	1.5		194	172	153	129	100	65
S4P-2/30	2.2		260	232	209	172	135	92

SILVER LINE SERIES


FLOATING IMPELLER MODEL

Nominal Diameter : **4"**

Nominal Flow : **2m³/h**

Outlet Size : **1 1/4"**

Performance Curves

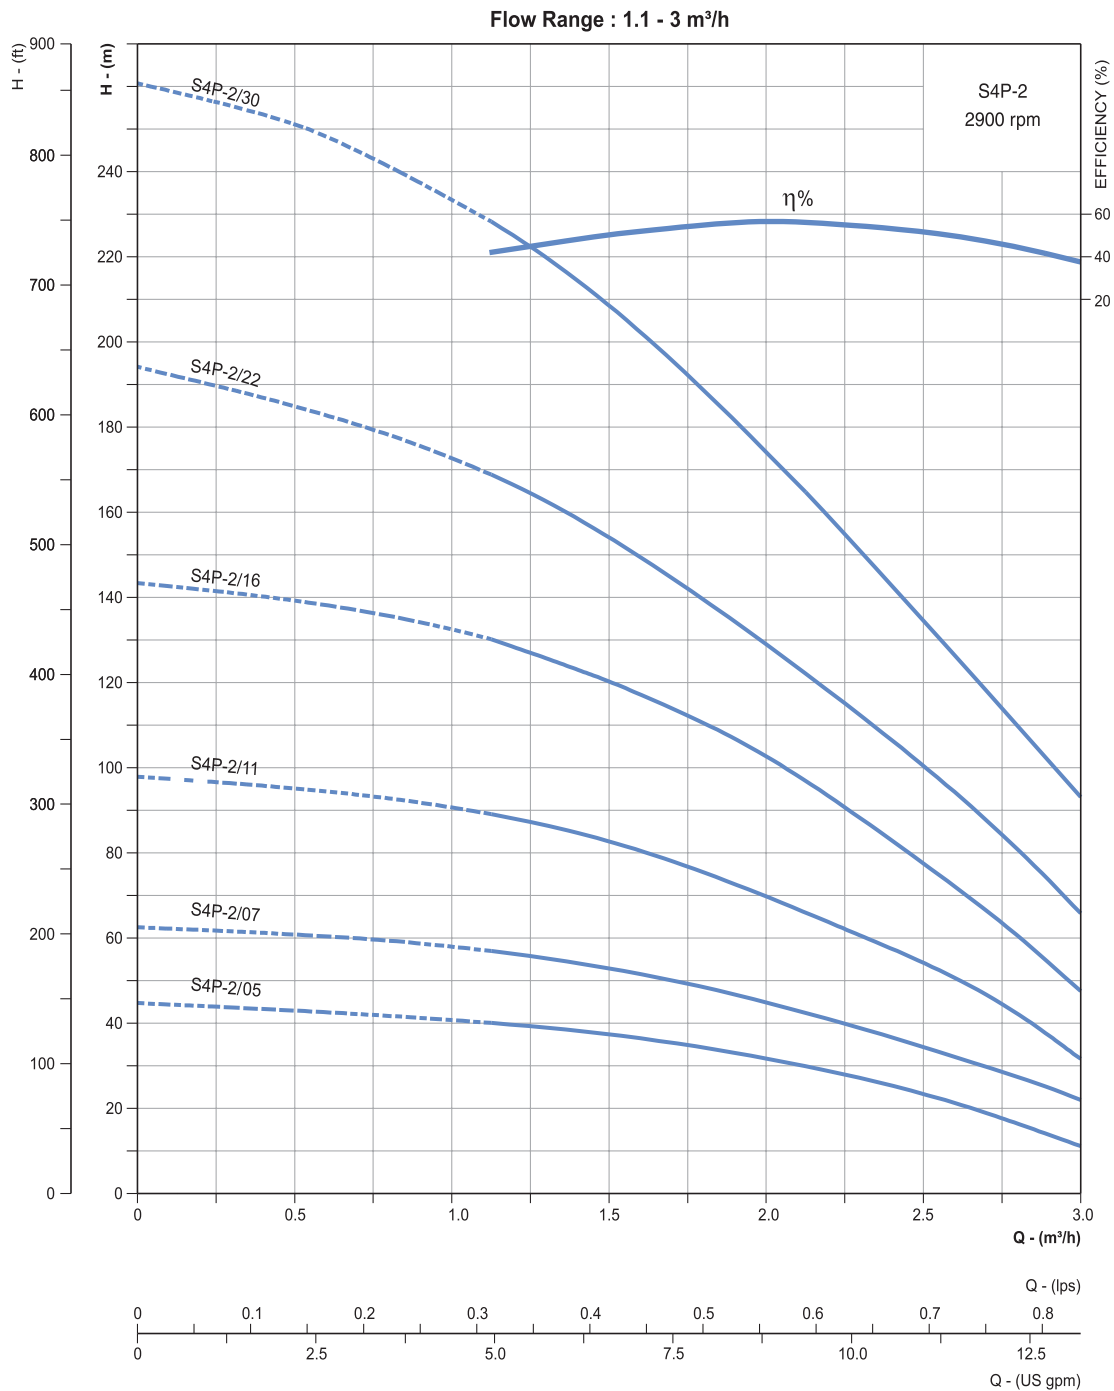

Refer General Information for performance curve conditions and for more details.
 Curve tolerance according to ISO : 9906, Grade - 3B